ALUMINIUM TELESCOPIC WHEELCHAIR/SCOOTER RAMPS

ZT-664-WCR5/ZT-664-WCR7

USER MANUAL

FEATURES

AVAILIBLE IN TWO SIZES 5FT AND 7FT

Three section anodised aluminium wheelchair/scooter channel ramps, lightweight construction.
Full length anti-slip coating on channels (PHOTO 2) with double sided anti-slip coating on angled lips at both ends.
Comes with transport bag.
Outer Width 16.2cm/6⅜"
Inner Width 11.5cm/4½"
Side Height 3.8cm/1½"
Maximum Carrying Weight 158kg/25 stone

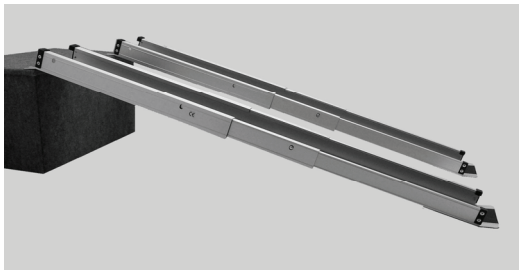

ZT-664-WCR5 5FT Extends From 74cm/29" - 152cm/60"
Product weight 6kg

ASSEMBLY

1. To use the ramps remove from transport bag and remove all packaging.
2. To extend to use the ramps, press the spring loaded plunger (PHOTO 1) and slide the sections apart, making sure that the spring loaded plunger is located in the locking hole, repeat the process to extend the ramps fully and the same for the second ramp.
3. Position both the ramps on the door step/car so that the Wheelchair/ Scooter can access the ramps equally, when the ideal distance is found, cut the string to the size of gap between the ramps. Next time you use the ramps, you place the string as a quick reference to show the distance the ramps should be apart for the wheelchair/scooter to access them (PHOTO 3).

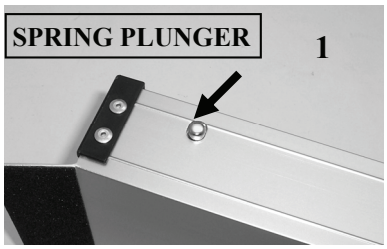

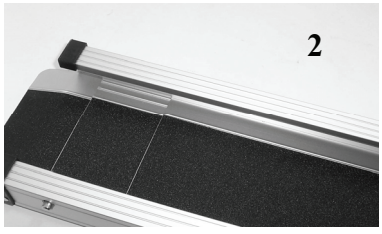

PHOTO 3

MAINTENANCE

1. Brush the inside with a soft hand brush, wipe the exterior with a damp Cloth.
2. Do not use any cleansers that may cause damage to the ramps.
3. Do not leave the ramps in the extended position as this may cause the spring plungers to jam, check that the spring plunger are free to move on a regular basis.

Please ensure that this manual is read and understood before using the Wheelchair Ramps

Z-Tec Mobility, Unit 1B, Albion Works, Moor Street, Brierley Hill, West Midlands, DY5 3SZ

(April.07/1)